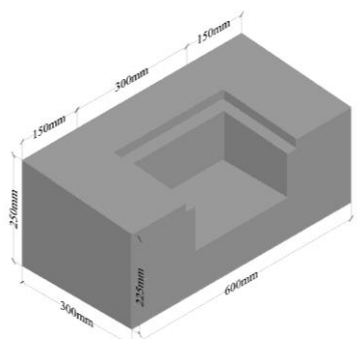


## Technical Specifications for Wet Cast Gully Kerbstones

### Product Description

Supply of Gully Kerbstones of VYARA make, as per the below profile drawing.

Profile	Length (mm)	Width (mm)	Thickness (mm)
	600	300	250-225

### Technical Parameters

Sr.	Parameters	Minimum Requirements
1.	Tolerance in Size (Length & Width)	±3 mm
2.	Tolerance in Thickness	±4 mm
3.	Visual	The face of the kerbstone shall not exhibit defects such as cracking or flaking

### Manufacturing & Quality Assurance

#### Manufacturing Process:

The kerbstone must be wet casted in elastomeric rubber moulds.

#### Quality Certifications:

The manufacturer must be ISO 9001:2015 certified or have equivalent quality management systems in place to ensure quality product.

#### Sustainability Requirements:

The product must meet the sustainability criteria and should be certified as a green product (GreenPro) by CII.

Vyara Tiles Limited

903-904 Rajhans Montessa, Near Le Meridian, Dumas Road, Surat 395007

Ph: 0261-2471595, 2472444 | E-mail: [info@vyaratiles.in](mailto:info@vyaratiles.in) | Website: [www.vyaratiles.in](http://www.vyaratiles.in)

Testing Facilities:

The manufacturer must have an in-house laboratory equipped to perform these tests:

Water Absorption | Bending Strength | Dimensional Accuracy