


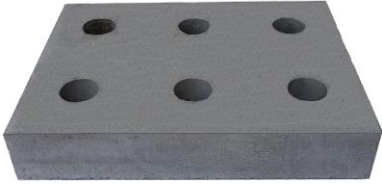

### Specifications for Reinforced Drain covers

Supply **Reinforced Drain Covers** of VYARA make.

Profile	Length (mm)	Width (mm)	Thickness (mm)
	600	450	100/80
	700	300	100/60
	940	300	100

Sr.	Parameters	Minimum Requirements
1.	Percentage Water Absorption	Average not over 8%
2.	Tolerance in size (length + breadth)	± 2.5mm
3.	Tolerance in Thickness of block	± 4mm

- The face of the drain cover shall not exhibit defects such as cracking or flaking when examined.
- The manufacturing company must be an ISO 9001 certified Company or should have equivalent quality management systems in place to ensure quality product.
- The drain covers must meet the sustainability criteria and should be certified as a green product by CII.
- The drain covers must be tested at the manufacturer's laboratory before dispatch for: Water absorption, and dimensional accuracy. Internal test report needed with every supply.

**Testing to be carried out in accordance with EN 1340**